

## A12T/A13T

Temperature Humidity Meters



A12T/13T measures real-time temperature and humidity and display readings on a large screen. These can be used for both indoor and outdoor measurements. A12T has an additional external sensor probe for measuring temperatures of two locations. Both of these meters have alarm clock and 12/24 time mode. A12T displays comfort rating based on the combination of temperature and humidity. Hanging hole and stand are available for wall or table mount.

Applications: Labs, offices, hotels, schools, factories, meeting rooms, airports, pharmacies, warehouses, restaurants, greenhouses, nurseries, gardens, homes, shopping malls, museums, animal husbandry, and more.



SPECIFICATION	Range	A12T	A13T
Certificates	CE, RoHS		
Temperature (°C)	-10°C-50°C	±1°C (0-40°C)	±1°C (0-40°C)
Humidity	20%-95%RH	±5%RH (40%-80%RH)	±5%RH (40%-80%RH)
External temperature probe	-10°C-50°C	±1°C (0-40°C)	
°C/°F selection		√	√
MAX/MIN		√	
Comfort rating		Humid/dry/comfort	
Sampling time		10s	10s
Alarm clock/time display		√	√
Date/calendar		√	√
12/24 hour modes		√	√
External temperature probe		√	


GENERAL CHARACTERISTICS	
Power	1.5V battery (R03) x 1
Display	92.5mm x 60mm
Product net weight	110g
Product size	130mm x 22mm x 78mm
Standard accessories	Batteries, external temperature probe (A12T), English manual
Standard individual packing	Gift box
Standard quantity per carton	80pcs
Standard carton measurement	400mm x 330mm x 290mm
Standard carton gross weight	A12T: 13.2kg; A13T: 12.2kg

## A15F

Formaldehyde Meter

A15F is an air quality monitor for real time monitoring of formaldehyde (HCHO), a colorless carcinogenic gas. This device is widely used in homes, shopping malls, offices, vehicles and more.

- Auto power off/backlight
- Low battery indication
- Date and time
- Visual backlight alarm
- MAX/MIN
- Concentration emoticon

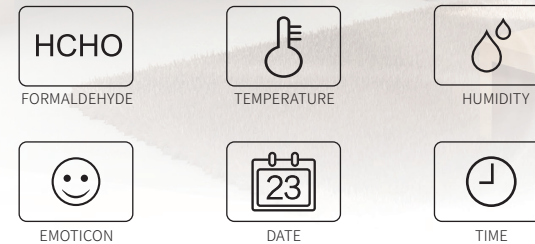

SPECIFICATION	Range	Resolution	Accuracy
Certificates	CE, RoHS		
Formaldehyde (mg/m³)	0-2mg/m³	0.01mg/m³	≤0.14mg/m³; ±25%+0.05mg/m³
Temperature (°C)	-10°C-50°C	0.1°C	±1°C
Temperature (°F)	14°F-122°F	0.2°F	±1.8°F
Humidity	0%RH-99%RH	1%RH	±5%RH@30%-80%RH ±8%RH@<30%RH, >80%RH

GENERAL CHARACTERISTICS	
Power	1300mAh rechargeable battery
Display	64.75 x 42mm
Product net weight	230g
Product size	130mm x 75mm x 55.4mm
Standard accessories	1m USB interface cable, English manual
Standard individual packing	Gift box, blister
Standard quantity per carton	5pcs
Standard carton measurement	360mm x 185mm x 140mm
Standard carton gross weight	2.2kg