
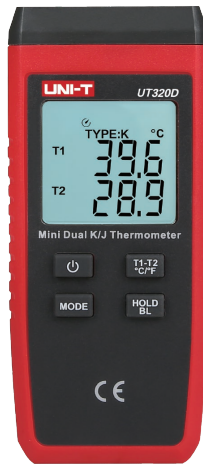


UT320 SERIES

Mini Contact Type Thermometers

UT320A and UT320D are single and dual channel contact type thermometers respectively. These highly accurate thermometers have a wide temperature range. UT320D can also calculate the temperature difference of its two channels. UT320 can be used with any K or J temperature probe.

- Auto power off
- Low battery indication
- Data hold
- °C/°F selection
- MAX/MIN/AVG
- Mode selection (K/J)
- Backlight
- 1m drop proof

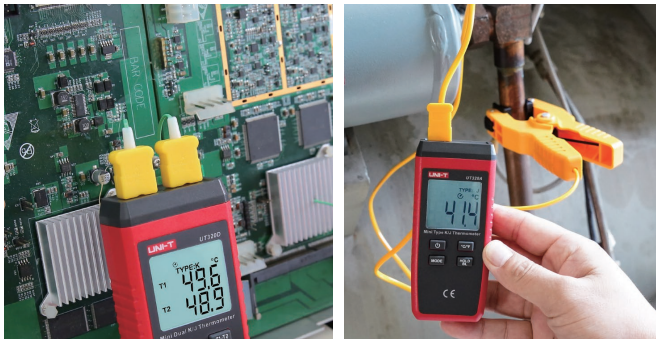

● UT320D

SPECIFICATION	Range	UT320A	UT320D
Certificates	CE, RoHS		
Temperature measurement (K)	-50°C-1300°C	±(0.5%+1)	±(0.5%+1)
Temperature measurement (J)	-50°C-1200°C	±(0.5%+1)	±(0.5%+1)
Display mode		Single	Dual
Difference measurement (T1-T2)			v
Operating temperature	0°C-40°C		
Operating humidity	≤80%RH		
GENERAL CHARACTERISTICS			
Power	1.5V battery (R03) x 3		
Display	37.4mm x 36.4mm		
Product net weight	60g		
Product size	120mm x 53mm x 28mm		
Standard accessories	K-type temperature probe, batteries, English manual		
Standard individual packing	Gift box		
Standard quantity per carton	20pcs		
Standard carton measurement	332mm x 225mm x 200mm		
Standard carton gross weight	3.4kg		

UT320 SERIES

Contact Type Thermometers

UT320 series contact type thermometers provide fast, accurate, and precise temperature measurement with thermocouple temperature probes. Users can select single or dual input, record, and analyze data through PC software. UT320 series can be used with a variety of temperature probes, satisfying multiple applications.

- °C/°F/K selection
- Data hold
- Auto power off
- Low battery indication
- MAX/MIN/AVG mode
- USB interface
- LCD backlight alarm
- Auto calibration



● UT325

SPECIFICATION	Range	UT321	UT322	UT325
Certificates	CE, RoHS			
Single or dual input		Single	Dual	Dual
Temperature probe type	Type K	-200°C-1372°C (-328°F-2501°F)	±(0.5%+0.8)	±(0.2%+0.6)
	Type J	-210°C-1200°C (-346°F-2192°F)	±(0.5%+0.8)	±(0.2%+0.6)
	Type T	-250°C-400°C (-418°F-752°F)	±(0.5%+0.8)	±(0.2%+0.6)
	Type E	-150°C-1000°C (-238°F-1832°F)	±(0.5%+0.8)	±(0.2%+0.6)
	Type R	0°C-1767°C (32°F-3212°F)		±(0.2%+2)
	Type S	0°C-1767°C (32°F-3212°F)		±(0.2%+2)
Resolution	0.1°C (When value>999.9°C: 1°C)		v	±(0.2%+1.5)
Data storage		100		100
High/low alarm				v
High/low signal output				v
GENERAL CHARACTERISTICS				
Power	USB or 9V battery (6F22)			
Display	30mm x 32mm			
Product net weight	270g			
Product size	175mm x 85mm x 30mm			
Standard accessories	Battery, USB interface cable, K-type temperature probe, English manual			
Standard individual packing	Gift box			
Standard quantity per carton	10pcs			
Standard carton measurement	405mm x 290mm x 165mm			
Standard carton gross weight	4.3kg			