

UT195E PROFESSIONAL TRMS IP65 MULTIMETER

- AC/DC Voltage: 1000V
- AC/DC Current: 20A
- Capacitance: 60mF
- Auto/Manual Ranging
- Flashlight & Auto LCD Backlight
- Analogue Bar Graph
- Sampling Rate: 3 times/sec
- Continuity Buzzer
- Low Battery Indication
- 6000 Display Count
- LoZ ACV: 600V
- Resistance: 60MΩ
- Frequency: 10MHz
- Duty Cycle
- Data Hold
- Diode
- MAX/MIN
- APO

excl VAT
R2 986.00



UT195EX PROFESSIONAL TRMS IP65 MULTIMETER

- AC/DC Voltage: 1000 V
- LoZ ACV : 600V
- AC/DC Current: 20A
- Resistance: 60MΩ
- Capacitance: 60mF
- Frequency: 10MHz
- Ex Rating: Ex ia I/IIC Ma Ga
- Ex tb IIIC T200°C Db IP65
- Auto/Manual Ranging
- Duty Cycle
- Flashlight & Auto LCD Backlight
- Analogue Bar Graph
- Sampling Rate: 3 times/sec
- Diode
- APO
- MAX/MIN
- Data Hold
- Continuity Buzzer
- Low Battery Indication
- 6000 Display Count

excl VAT
R3 774.00



UT677A BATTERY INTERNAL RESISTANCE TESTER

- Battery Internal Resistance Range: 0.0mΩ ~ 3mΩ
- Batter Voltage Range: 0.0V ~ 71V
- Temperature Range: -10°C ~ 60°C
- Screen: 3.5 inches
- Response Time: 200ms
- Measuring Time: 2sec
- USB Interface
- Bluetooth
- Data hold and Storage
- Measurement Judgement Function
- APO

excl VAT
R8 500.00



UT15C VOLTAGE TESTER (VOLTSTICK)

- LED AC/DC Voltage Indication (V) 12V ~ 690V
- LCD AC/DC Voltage Display (V) 24V ~ 690V
- Phase Rotation Test
- Single Lead (L2) Voltage Detection
- Continuity Test: Resistance 0~400kΩ, Beeper LED Light Indicator
- Polarity Detection
- Auto Range
- Low Battery Indication
- Work Light

excl VAT
R1 068.00



excl VAT
R2 045.00

UT501B 1kV INSULATION TESTER

- Insulation Test Voltage: 250V/500V/1000V
- Short Circuit Current: < 2mA
- Low Resistance: 0.01Ω ~ 200Ω
- AC Voltage: 600V
- Auto Ranging
- Low Battery Indication
- Alarm Indication
- Over Load Indication
- Auto Discharge
- Continuity
- DAR
- LCD Backlight
- Alarm Buzzer
- PI
- High Voltage Indication
- 10MΩ Internal Resistance Test
- 2000 Display Count

UT330TH DATA LOGGER

- Temperature Range: -30°C ~ 70°C
- Accuracy: +/- 0.4°C
- Resolution: 0.1°C
- Humidity: 0%RH ~ 100%RH
- IP67
- °C / °F Selection
- Data Storage 64 000 • Data Recall
- USB Interface
- Auto Record Time Setup
- User Name Settings
- Start Mode Setup
- LED Alarm
- Alarm Threshold
- Alarm Mode Setup
- Low Battery Indication

excl VAT
R1 027.00



A61 DIGITAL THERMOMETER

- Measurement: -40°C ~ 250°C
- Minimum Measuring Depth: 12mm
- NTC Sensor
- Stabilization Time: 20s
- Power: 3V button Cell
- Battery Duration: 12h
- IP65
- LED Alarm
- Data Hold
- MAX/MIN
- CATIII 600V

excl VAT
R340.00



UT521 2000Ω EARTH GROUND TESTER

- Earth Resistance Testing Range: 0 ~ 2000Ω
- Frequency (Hz) 50Hz/60Hz
- Manual Range
- LCD Backlight
- Full Icon Display
- Double Insulation Protection
- Data Hold
- Contact Badness Display
- Over-range Display
- Simple 2-wire Testing
- Precision 3-wire Testing
- APO
- 2000 Display Count
- AC Earth Voltage (V) 0 ~ 200V
- Data Storage 20
- Low Battery Indication

excl VAT
R3 919.00



LM60MI - MINI LASER DISTANCE METER

- Range: 60m
- Measurement Units: m/ft/in
- Laser Class: 2
- Laser Type: 630 ~ 670nm, <1mW
- Single Measurement
- Continuous Measurement
- MAX/MIN
- Pythagoras
- Data Storage 99
- Auto Laser Off
- Volume
- Add/Subtract
- APO

excl VAT
R1 027.00

UT18D VOLTAGE AND CONTINUITY TESTER

- LCD AC/DC Voltage Display (V) 6V ~ 690V
- Phase Rotation Test
- Single Lead (L2) Voltage Detection
- Continuity Test: Resistance 0~100kΩ, Beeper LED Light Indicator
- Polarity Detection
- Auto Range
- Low Battery Indication
- Over Voltage Prompt
- Flashlight
- Buzzer & Silent Mode
- Test Live Voltage Without Batteries
- LCD Backlight

excl VAT
R1 222.00



UT306S INFRARED THERMOMETER

- Single Laser
- Temperature: -50°C ~ 500°C
- Accuracy: +/- 2°C
- D:S Ratio: 12:1
- TN-LCD Display
- Emissivity: 0.1 ~ 1.0 Adjustable
- °C/°F Selection
- High/Low Temperature Alarm
- Laser On/Off
- APO
- Low Battery Indication
- MAX/MIN/AVG/DIFF Modes
- Response Time: 500s
- Data Hold


excl VAT
R340.00



UT320D MINI DUAL CONTACT THERMOMETER

- Measurement Range: -50 ~ 1300°C
- Dual Display Mode T1 & T2
- Difference Measurement T1 - T2
- MAX/MIN/AVG
- Backlight
- Data Hold
- APO
- Low Battery Indication
- Selection °C/°F
- Dual Thermocouples
- Mode Selection K/J

excl VAT
R786.00

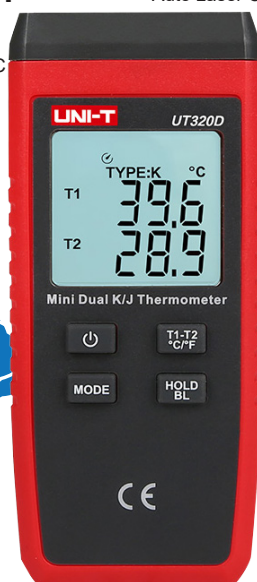

LM320B ANGLE METER

- Measurement Range: 4 x 90°
- Accuracy: +/- 0.2°
- Resolution: 0.01°
- Display: EBTN
- Laser Indication: Two Side Lasers
- Magnet Base: Four-side Magnets
- Relative / Absolute Measurement
- Low Battery Indication
- Data Hold
- Portable and Lightweight
- Unique Laser Design
- APO

excl VAT
R1 064.00



LM50A LASER DISTANCE METER

- Range: 50m
- Measurement Units: m/ft/in
- Min. Display Unit: 0.001m
- Measurement Basis: Front/Rear
- Accuracy: +/- 2mm
- Laser Class: 2
- Laser Type: 630 ~ 670nm, <1mW
- Single Measurement
- Continuous Measurement
- MAX/MIN/AREA
- Pythagoras
- Self Calibration
- Horizontal Bubble
- Data Storage 99 Groups
- APO
- Auto Laser Off
- Display Type: LCD
- Display Size: 50mm
- Audio Indication
- Volume
- Add/Subtract



excl VAT
R684.00

UT303C+ INFRARED THERMOMETER

- Temperature: -32°C ~ 1300°C
- Accuracy: +/- 1.5°C
- Repeatability: 0.7°C
- D:S Ratio: 30:1
- Response Time: 250ms
- Selection °C/°F
- Emissivity: 0.1 ~ 1.0 Adjustable
- Data Hold
- APO
- Spectral Response: 8μm~14μm
- Laser Power: < 1mW
- Data Storage 99
- Low Battery Indication
- Circular Laser
- MAX/MIN/AVG/DIFF
- LCD Backlight
- Lock Measurement
- High/Low LED & Audible alarm
- Schedule Measurement
- LCD Display Colour EBTN

excl VAT
R3 147.00



LM570LD-II LASER LEVELER

- Laser Type: Green LD
- Laser Line: 2 Lines
- Operating Distance: 10m
- Laser Wavelength: 520nm
- Laser Class: 2
- Laser Accuracy: +/-3mm/10m
- Self-Leveling Range: +/- 3°
- Self-Leveling Time: < 3s
- Working Hours: > 4h

excl VAT
R1 427.00

LM600G GOLF RANGE FINDER

- Distance Range: 3m ~ 600m
- Height: 250m
- Speed Range: 0 ~ 300km/h
- Magnification: 6x
- Angle: +/- 60°
- Eye Piece Aperture: 15mm
- Exit Pupil Diameter: 3.7mm
- Flagpole Lock
- Golf Trajectory Compensation Mode
- Slope Measurement
- APO
- Accuracy: 0.2%
- Power: 3.7V Li-ion
- Objective Aperture: 19mm
- Height Measurement



excl VAT
R2 409.00